

**Features and Benefits**

- Smooth and compliant surface
- Electrically isolating
- RoHS compliant
- Sheet form, roll form and die-cut options

**Typical Applications**

- Power supplies
- Automotive electronics
- Motor controls
- Power semiconductors

**Optional Configurations**

- Can be die-cut into specific dimensions

The OI-1000 is a series of thermally conductive material with electrical isolation property. It is especially suitable for applications where low mounting pressures for component clamping is required e.g. low component clamping forces for discrete semiconductors mounted with spring clips for a speedy assembling process.


The smooth and compliant surface characteristics of OI-1000 materials can minimize interfacial thermal resistance and maximize thermal performance for such applications. OI-1000 is ROHS compliant, offering extra reassurance in applications where hazardous substances are forbidden.

Properties	OI-1000 Series	Test Method
Construction & Composition	Reinforced ceramic-filled silicone elastomer	—
Color	Grey, Green, Yellow	—
Thickness	0.01~0.018" (0.254~0.457)	—
Specific gravity (g/cm <sup>3</sup> )	> 1.6	ASTM D297
Hardness (Shore A)	70 ± 5	ASTM D2240
Tensile Strength (kgf/cm <sup>2</sup> )	> 180	ASTM D412
Dielectric Strength (kV/mm)	> 6	ASTM D149
Thermal Conductivity (W/m-K)	1.2	ASTM D5470 (modified)
Volume Resistivity /ohm.cm	6.2 x 10 <sup>14</sup>	ASTM D257
Temperature Range (°C)	-40~240	—
Flammability Rating	Compliant with UL standards	—

Please contact us for other special requirements

Carrier Treatment	Criteria
Fiber Glass (FG)	Compulsory for all thickness
Rubberized Cloth (RC)	Not Recommended
Pressure Sensitive Adhesive (PSA)	Optional to all thickness
Detachable Adhesive (DA)	Not Recommended
Aluminum Foil (AL)	Not Recommended
Kapton (PI)	Not Recommended
Talc treatment (DAT)	Not Recommended

**Product Code and Descriptions**

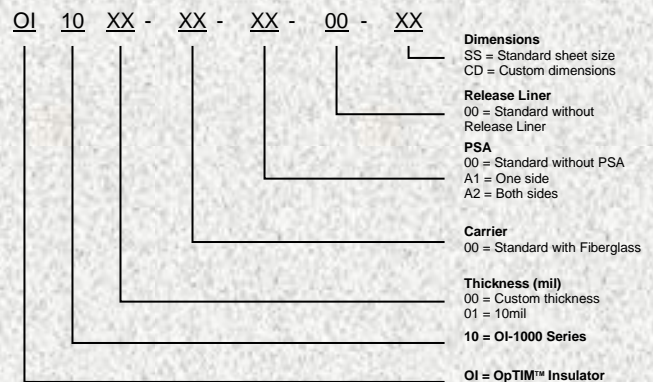

**SEM (North America) Inc.**

Tel: +1 585-643-2000  
Fax: +1 585-427-7216  
Address: 1555 Jefferson Road, Rochester, NY 14623

**SEM Belgium bv**

+32 59 560 270  
Schatting 73, 8210 Zedelgem, Belgium

**SEM Asia Ltd.**

+852 2686 8168  
+852 2686 8268  
Unit 1, 3/F Block A, New Trade Plaza, 6 On Ping Street, Shatin, N.T., Hong Kong

**SEM (Dongguan) Ltd.**

+86-769-8334 1628  
+86-769-8334 2028  
No. 8A Qiaoxin Road, Qiaotou, Dongguan, Guangdong, China  
Postal code 523525

Specifications and appearances may change without notice. All statements, technical information and recommendations herein are based on tests that we believed to be reliable, but the accuracy and completeness are not guaranteed. Before using, user should determine the suitability of the product for its intended use, and the user assumes all risks and liabilities whatsoever in connection therewith. Neither the seller nor the manufacturer shall be liable for any loss or damage, direct, incidental or consequential, including loss of profits or revenues arising from the use or inability to use the product. Any statements or recommendations shall have no effect unless contained in an agreement signed by authorized personnel of the seller and manufacturer.